

HUNTER DOUGLAS AWNING CANVAS

HunterDouglas®

5 Year Warranty and is Australian made, for Australian conditions

Strong and durable, the superior awning canvas created by HunterDouglas is exclusively manufactured to withstand the rigours of the most demanding Australian conditions. HunterDouglas canvas not only provides UV protection and stain resistance through Duraguard® Fabric protection¹, but is available in a huge range of colours and styles for maximum flexibility.

TECHNICAL DATA:

Fibre Content	52% Polyester, 48% Cotton	
Weave	Plain	
Weight	498 gsm ± 100	
Nominal Width	220 cm	
Roll length	35 m	
Tensile Strength	Warp: 2315N	Weft: 1700N
Tear Strength	Warp: 63.8N	38.3N
Colour Fastness:	6-7 (Range: 1-Lowest to 7-Highest)	Standard: AS2001.4.21
Fungal Resistance	Leaching: 0,0,0	Heating: 0,0,0
Privacy Factor	High	
Ignitability Index	16 (Range 0-20)	
Spread of Flame Index	8 (Range 0-10)	
Heat Evolved Index	5 (Range 0-10)	
Smoke Developed Index	5 (Range 0-10)	

COMFORT RATING#:

Colour	Heat Protection	Shade Factor	Glare Reduction	UV Protection
C15	◆◆◆◆	◆◆◆◆	◆◆◆	◆◆
C9200	◆◆◆◆	◆◆◆◆	◆◆◆	◆◆
C907	◆◆◆◆	◆◆◆◆	◆◆◆◆	◆◆◆
C181	◆◆◆◆	◆◆	◆	◆

- ◆◆◆◆: Highest level of protection/performance
- ◆◆◆: High level of protection/performance
- ◆◆: Medium level of protection/performance
- ◆: Low level of protection/performance
- ◆: No protection

SOLAR OPTICAL PROPERTIES:

Colour	TS	RS	AS	TL	RL	AL	TUV	SC
C15	0	31	69	0	18	82	0	100
C9200	0	39	61	0	25	75	0	100
C907	1	50	49	1	42	57	0	99
C181	0	7	93	0	7	93	0	100

Solar Optical Properties Guide:

Ts: Heat transmittance (%)

As: Heat Absorbance (%)

RI: Light Reflectance (%)


Tuv: Ultraviolet Transmittance

Rs: Heat Reflectance (%)

TL: Light Transmittance (%)

Al: Light Absorbance (%)

Sc: Shading Coefficient

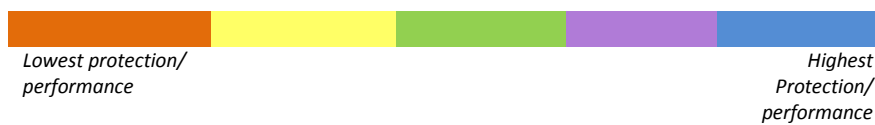

1 : Duraguard is a water based stain repelling formula that effectively repels most stain causing agents. When stain causing agents like water, dust, etc come into contact with the treated fabric, the water forms beads on the surface and simply rolls off the fabric.

#: Comfort Rating has been devised by Hunter Douglas Limited with the assistance of Canesis Pty Ltd – an independent Australian Fibre and Textile Research and Development Company.

Note: The information contained in this specification is believed to be true and correct at the date of issue, however the manufacturer reserves the right to alter this document without prior notice.